


AUSTROADS
SINGLE UNIT TRUCK / BUS (12.5 m)
Radius 15 m
Indicative turning speed 5-15 km/h

Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 Two single turns: 1.0 m
 One single turn and one double turn: 2.0 m
 Two double turns: 2.0 m

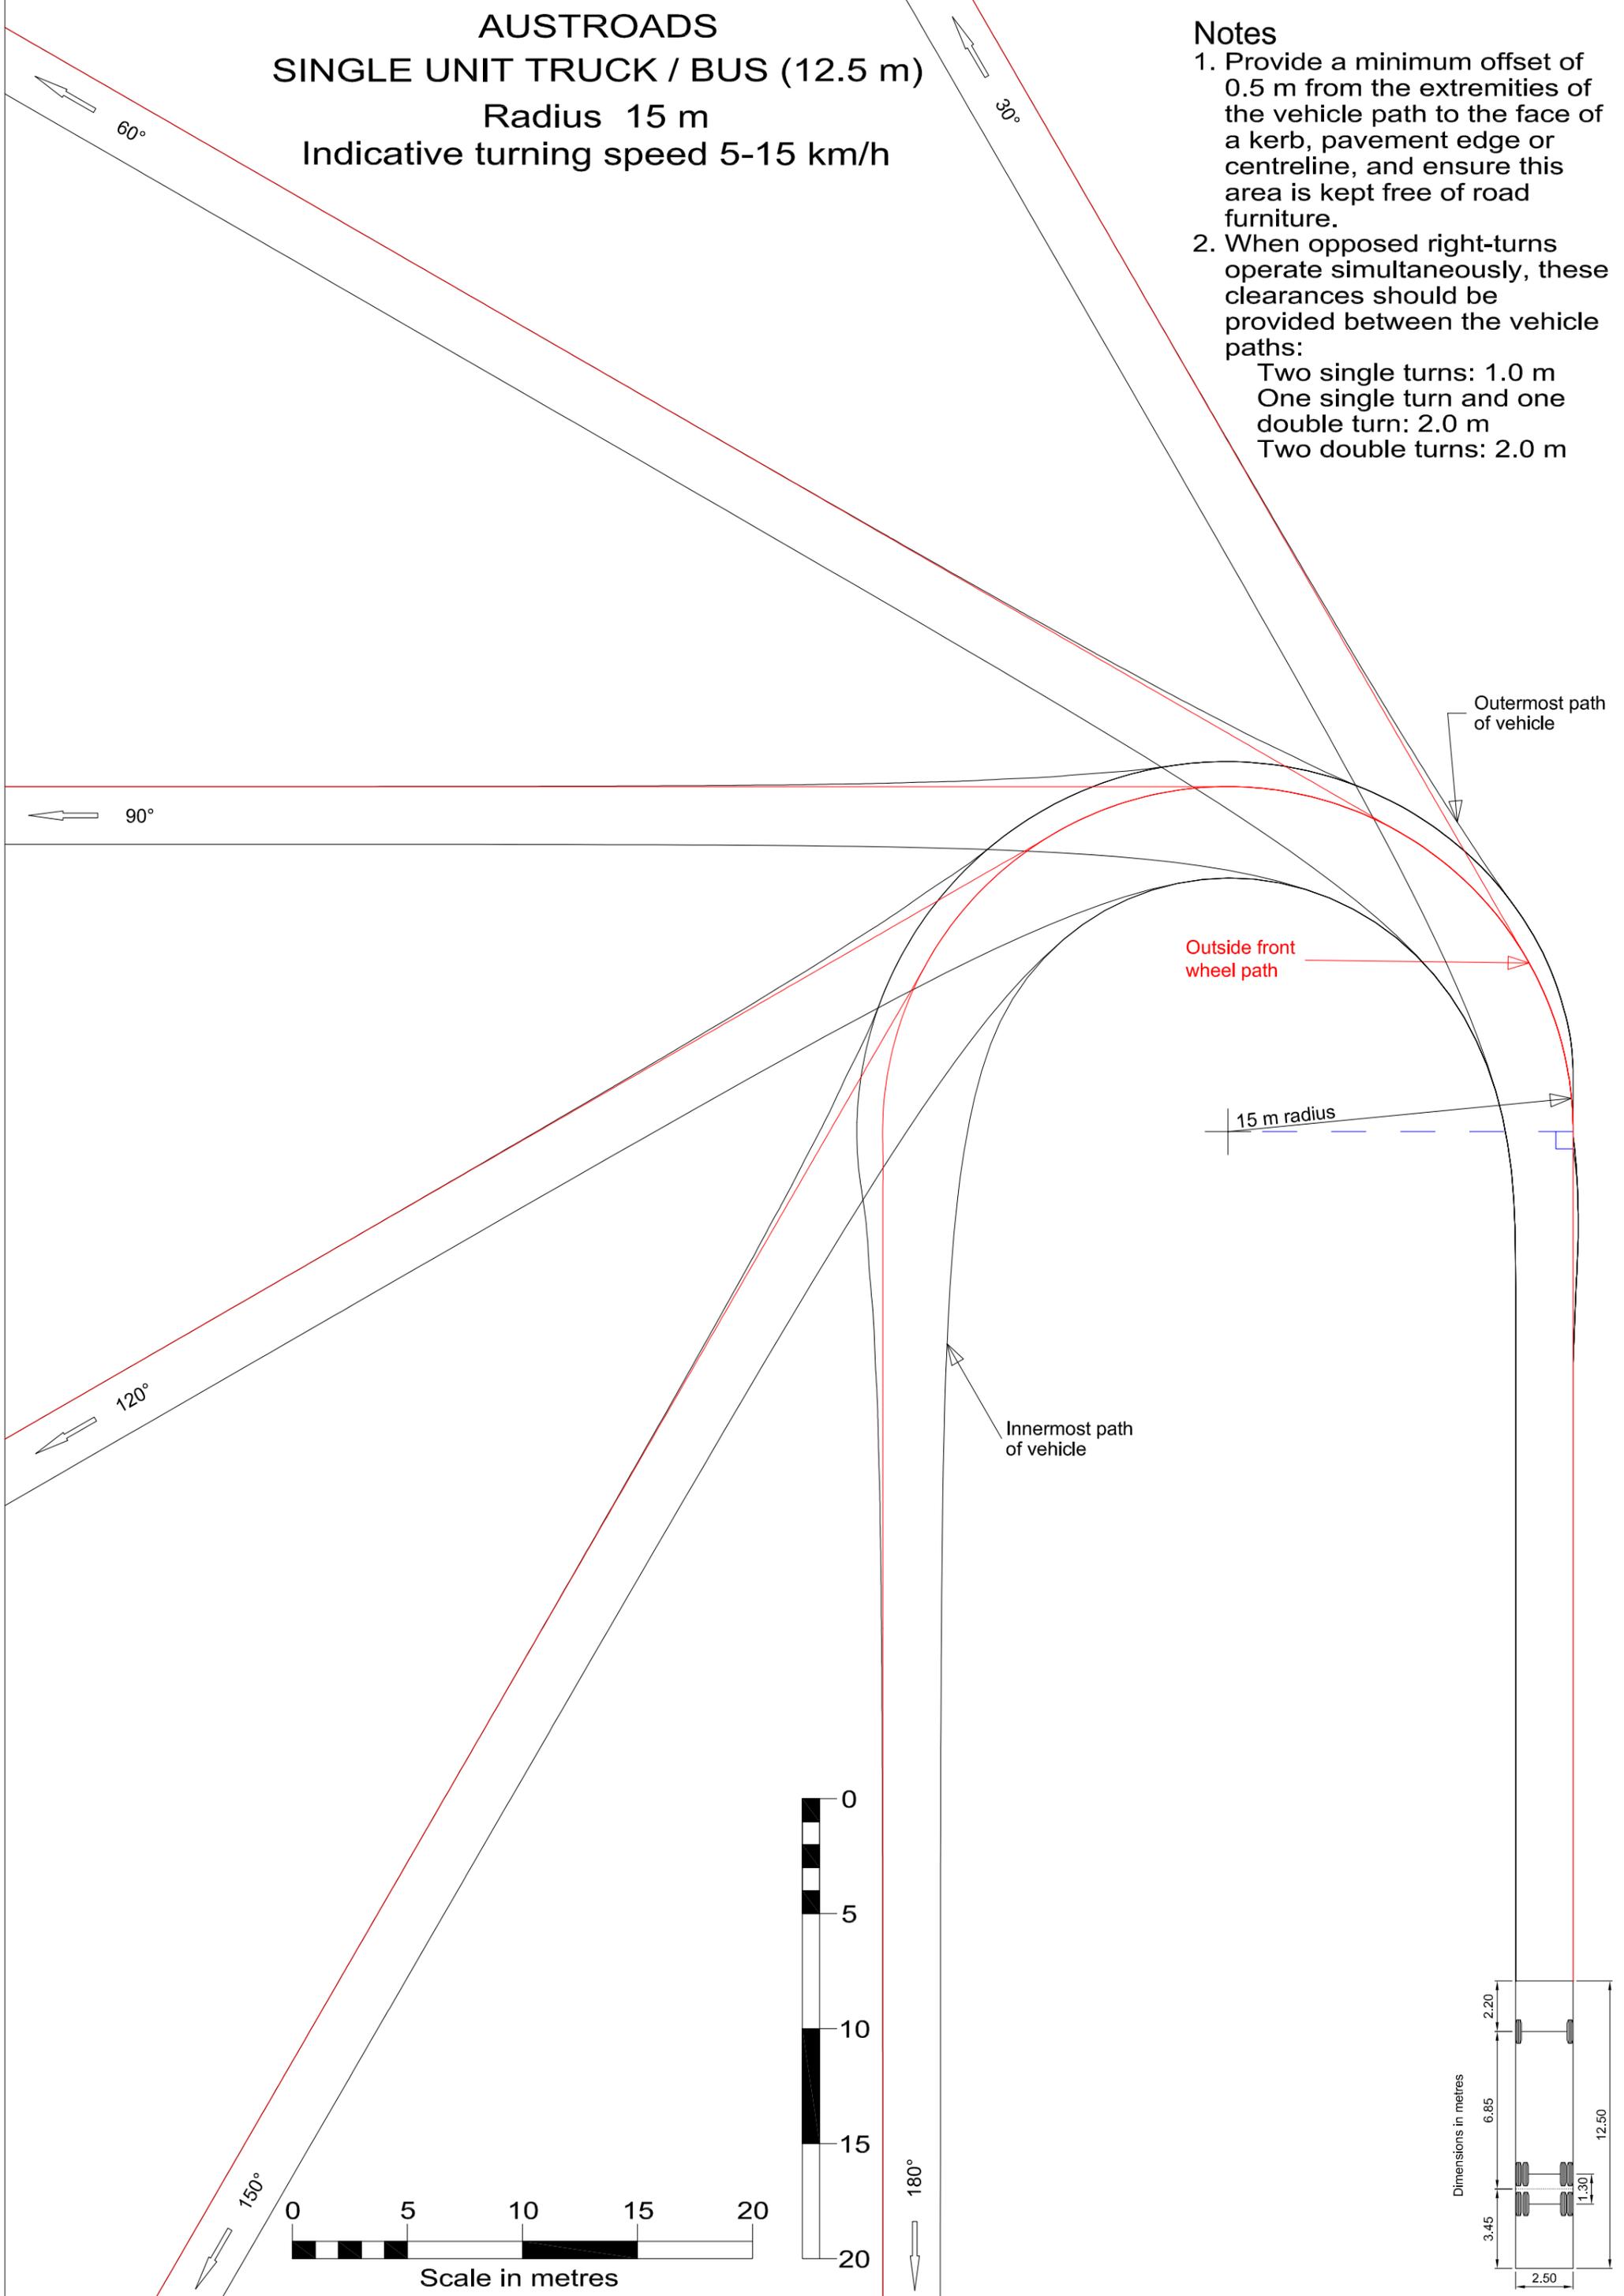

Outermost path of vehicle

Outside front wheel path

15 m radius

Innermost path of vehicle

0 5 10 15 20
 Scale in metres

0
 5
 10
 15
 20

