


Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 - Two single turns: 1.0 m
 - One single turn and one double turn: 2.0 m
 - Two double turns: 2.0 m

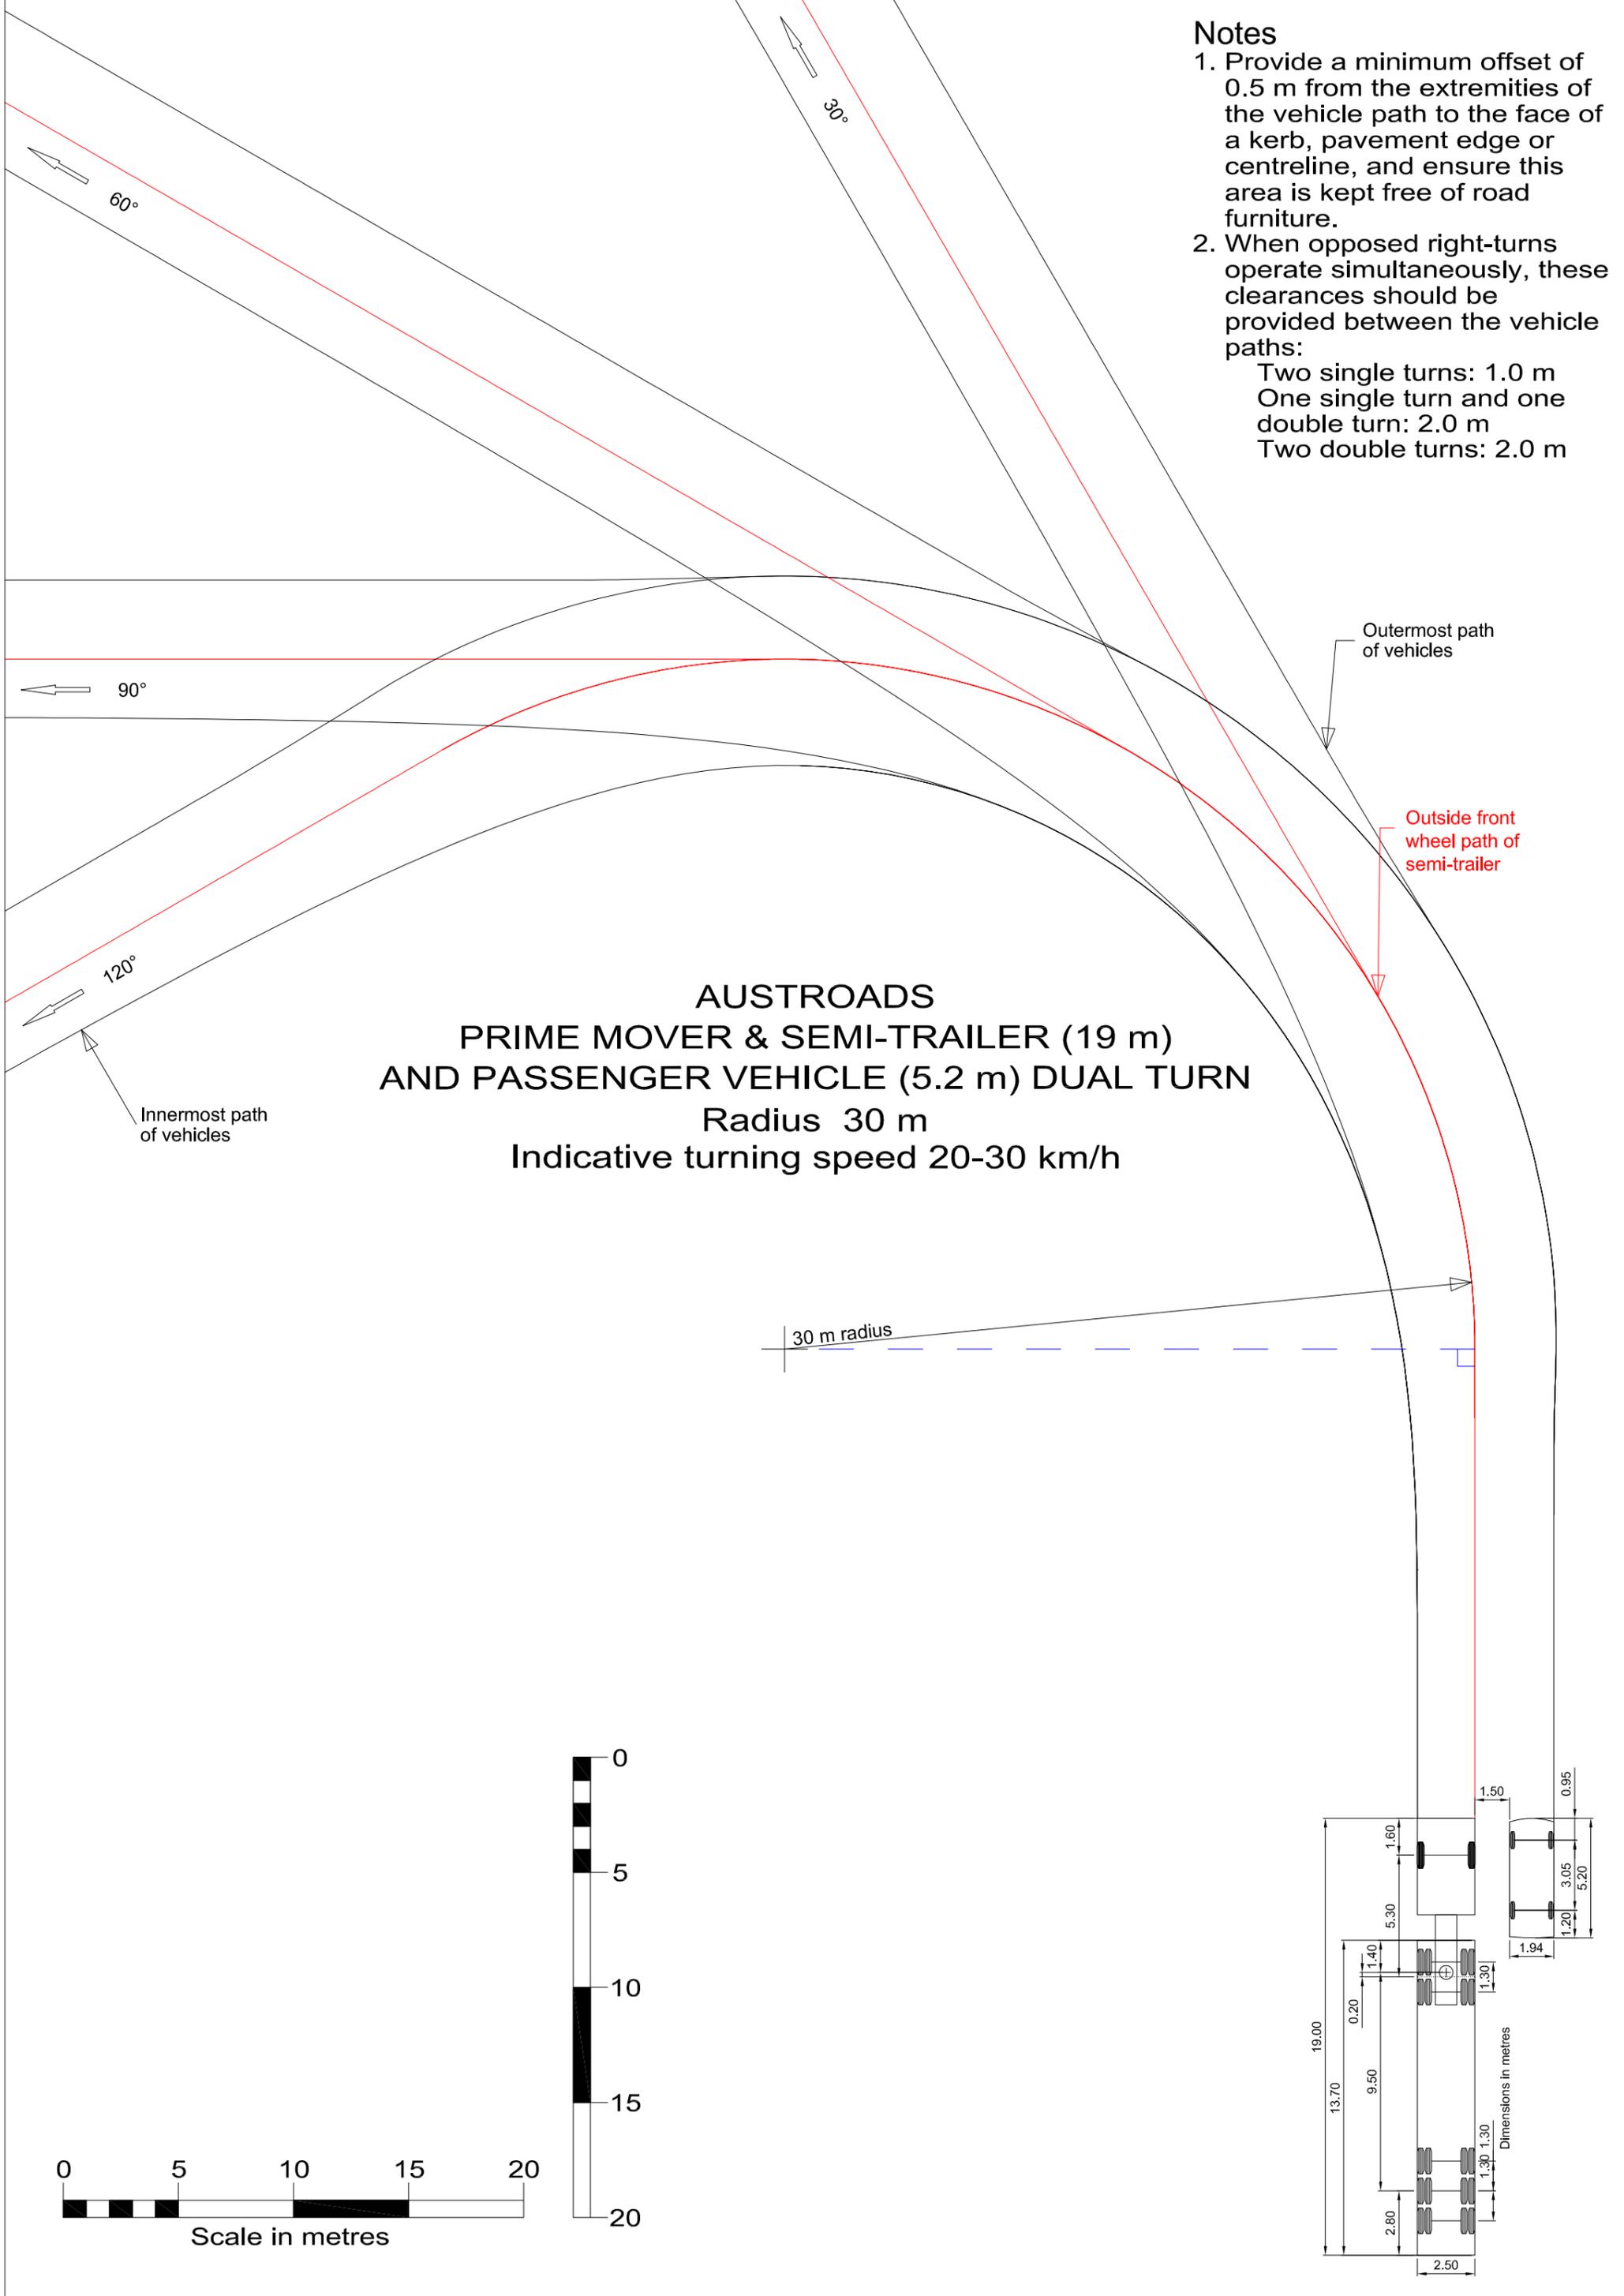

AUSTROADS
PRIME MOVER & SEMI-TRAILER (19 m)
AND PASSENGER VEHICLE (5.2 m) DUAL TURN
Radius 30 m
Indicative turning speed 20-30 km/h

Outermost path of vehicles

Outside front wheel path of semi-trailer

Innermost path of vehicles

30 m radius

