


AUSTROADS
A-TRIPLE (TYPE II) (53.4 m)
 Radius 20 m
 Indicative turning speed 15-20 km/h


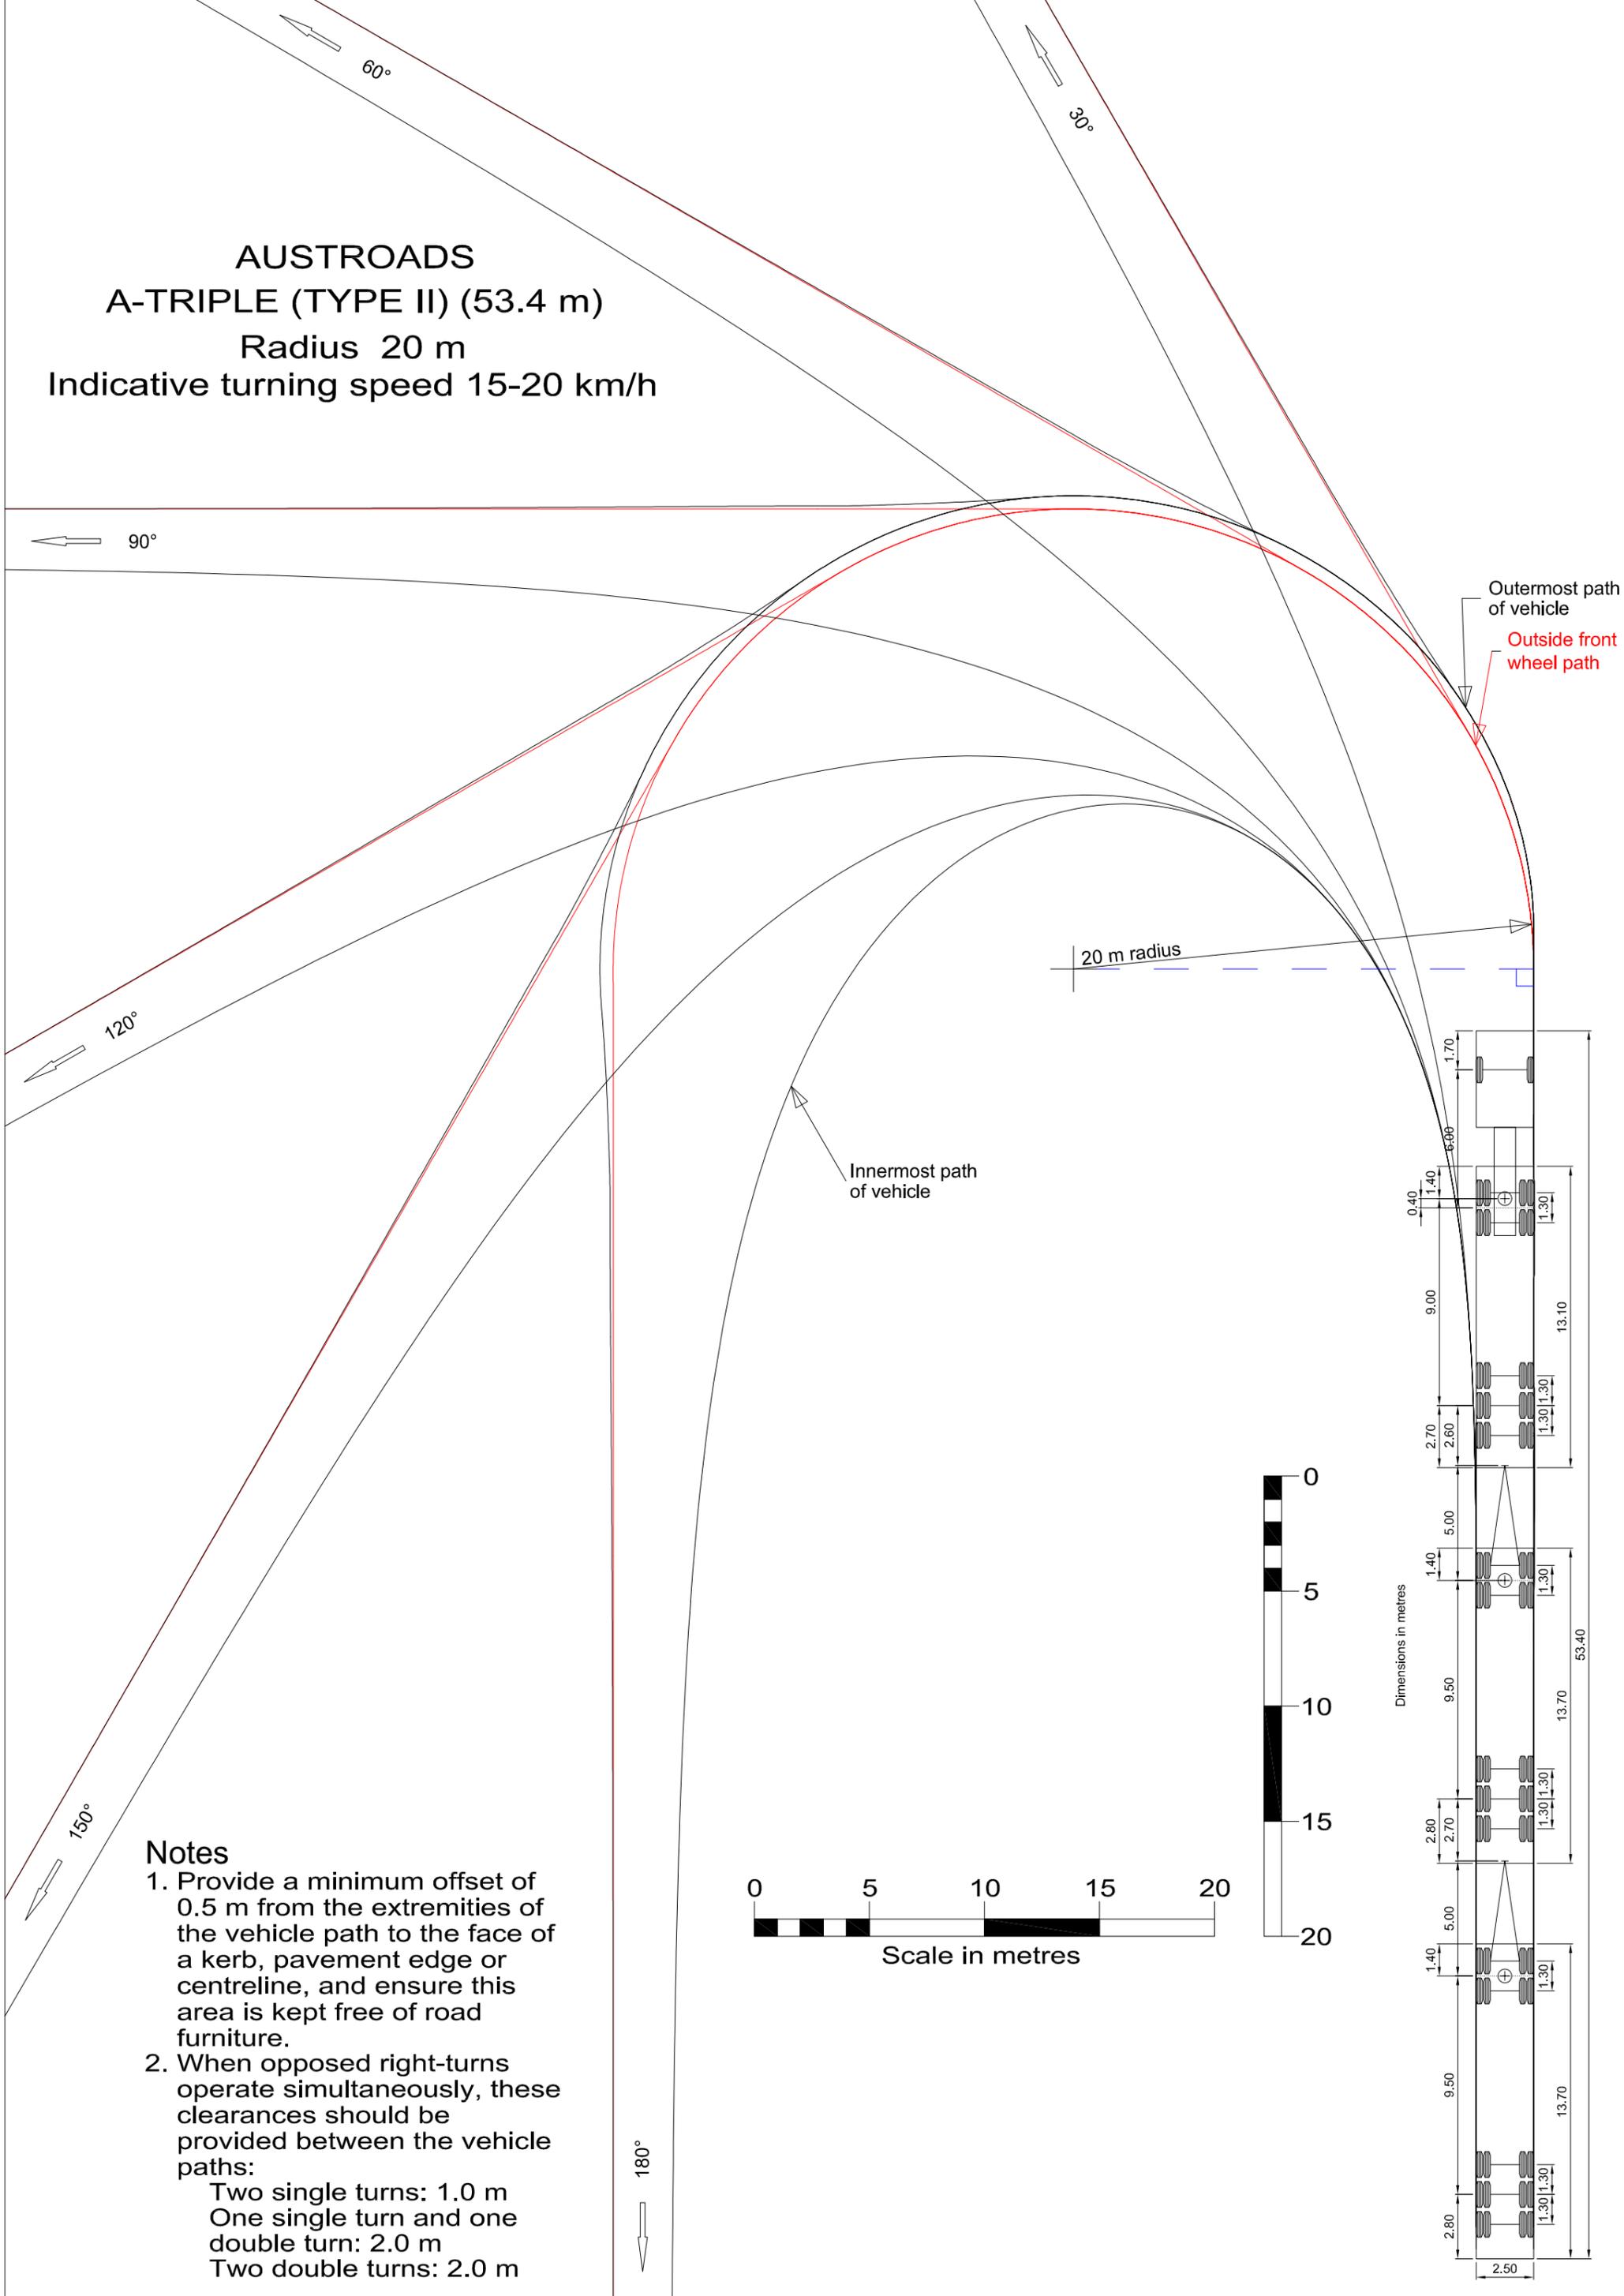


Outermost path of vehicle
 Outside front wheel path

20 m radius


Innermost path of vehicle

Dimensions in metres

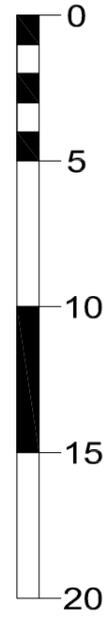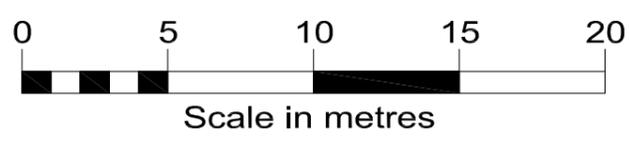

Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 Two single turns: 1.0 m
 One single turn and one double turn: 2.0 m
 Two double turns: 2.0 m

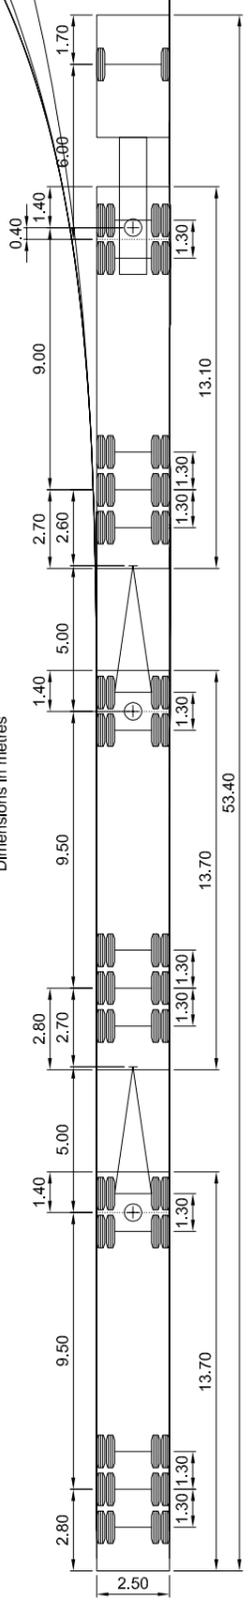

180°

90°

120°

150°

60°

30°