

Notes

- 1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
- 2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 - Two single turns: 1.0 m
 - One single turn and one double turn: 2.0 m
 - Two double turns: 2.0 m



AUSTROADS
ARTICULATED BUS (19 m)
Radius 30 m
Indicative turning speed 20-30 km/h

Innermost path of vehicle

Outermost path of vehicle

Outside front wheel path

30 m radius

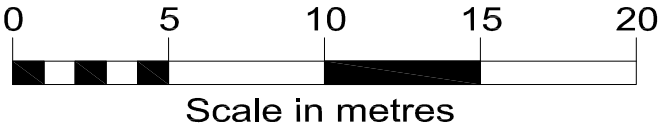

Dimensions in metres

