


### Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
  - Two single turns: 1.0 m
  - One single turn and one double turn: 2.0 m
  - Two double turns: 2.0 m



**AUSTROADS**  
**SINGLE UNIT TRUCK / BUS (12.5 m)**  
Radius 30 m  
Indicative turning speed 20-30 km/h

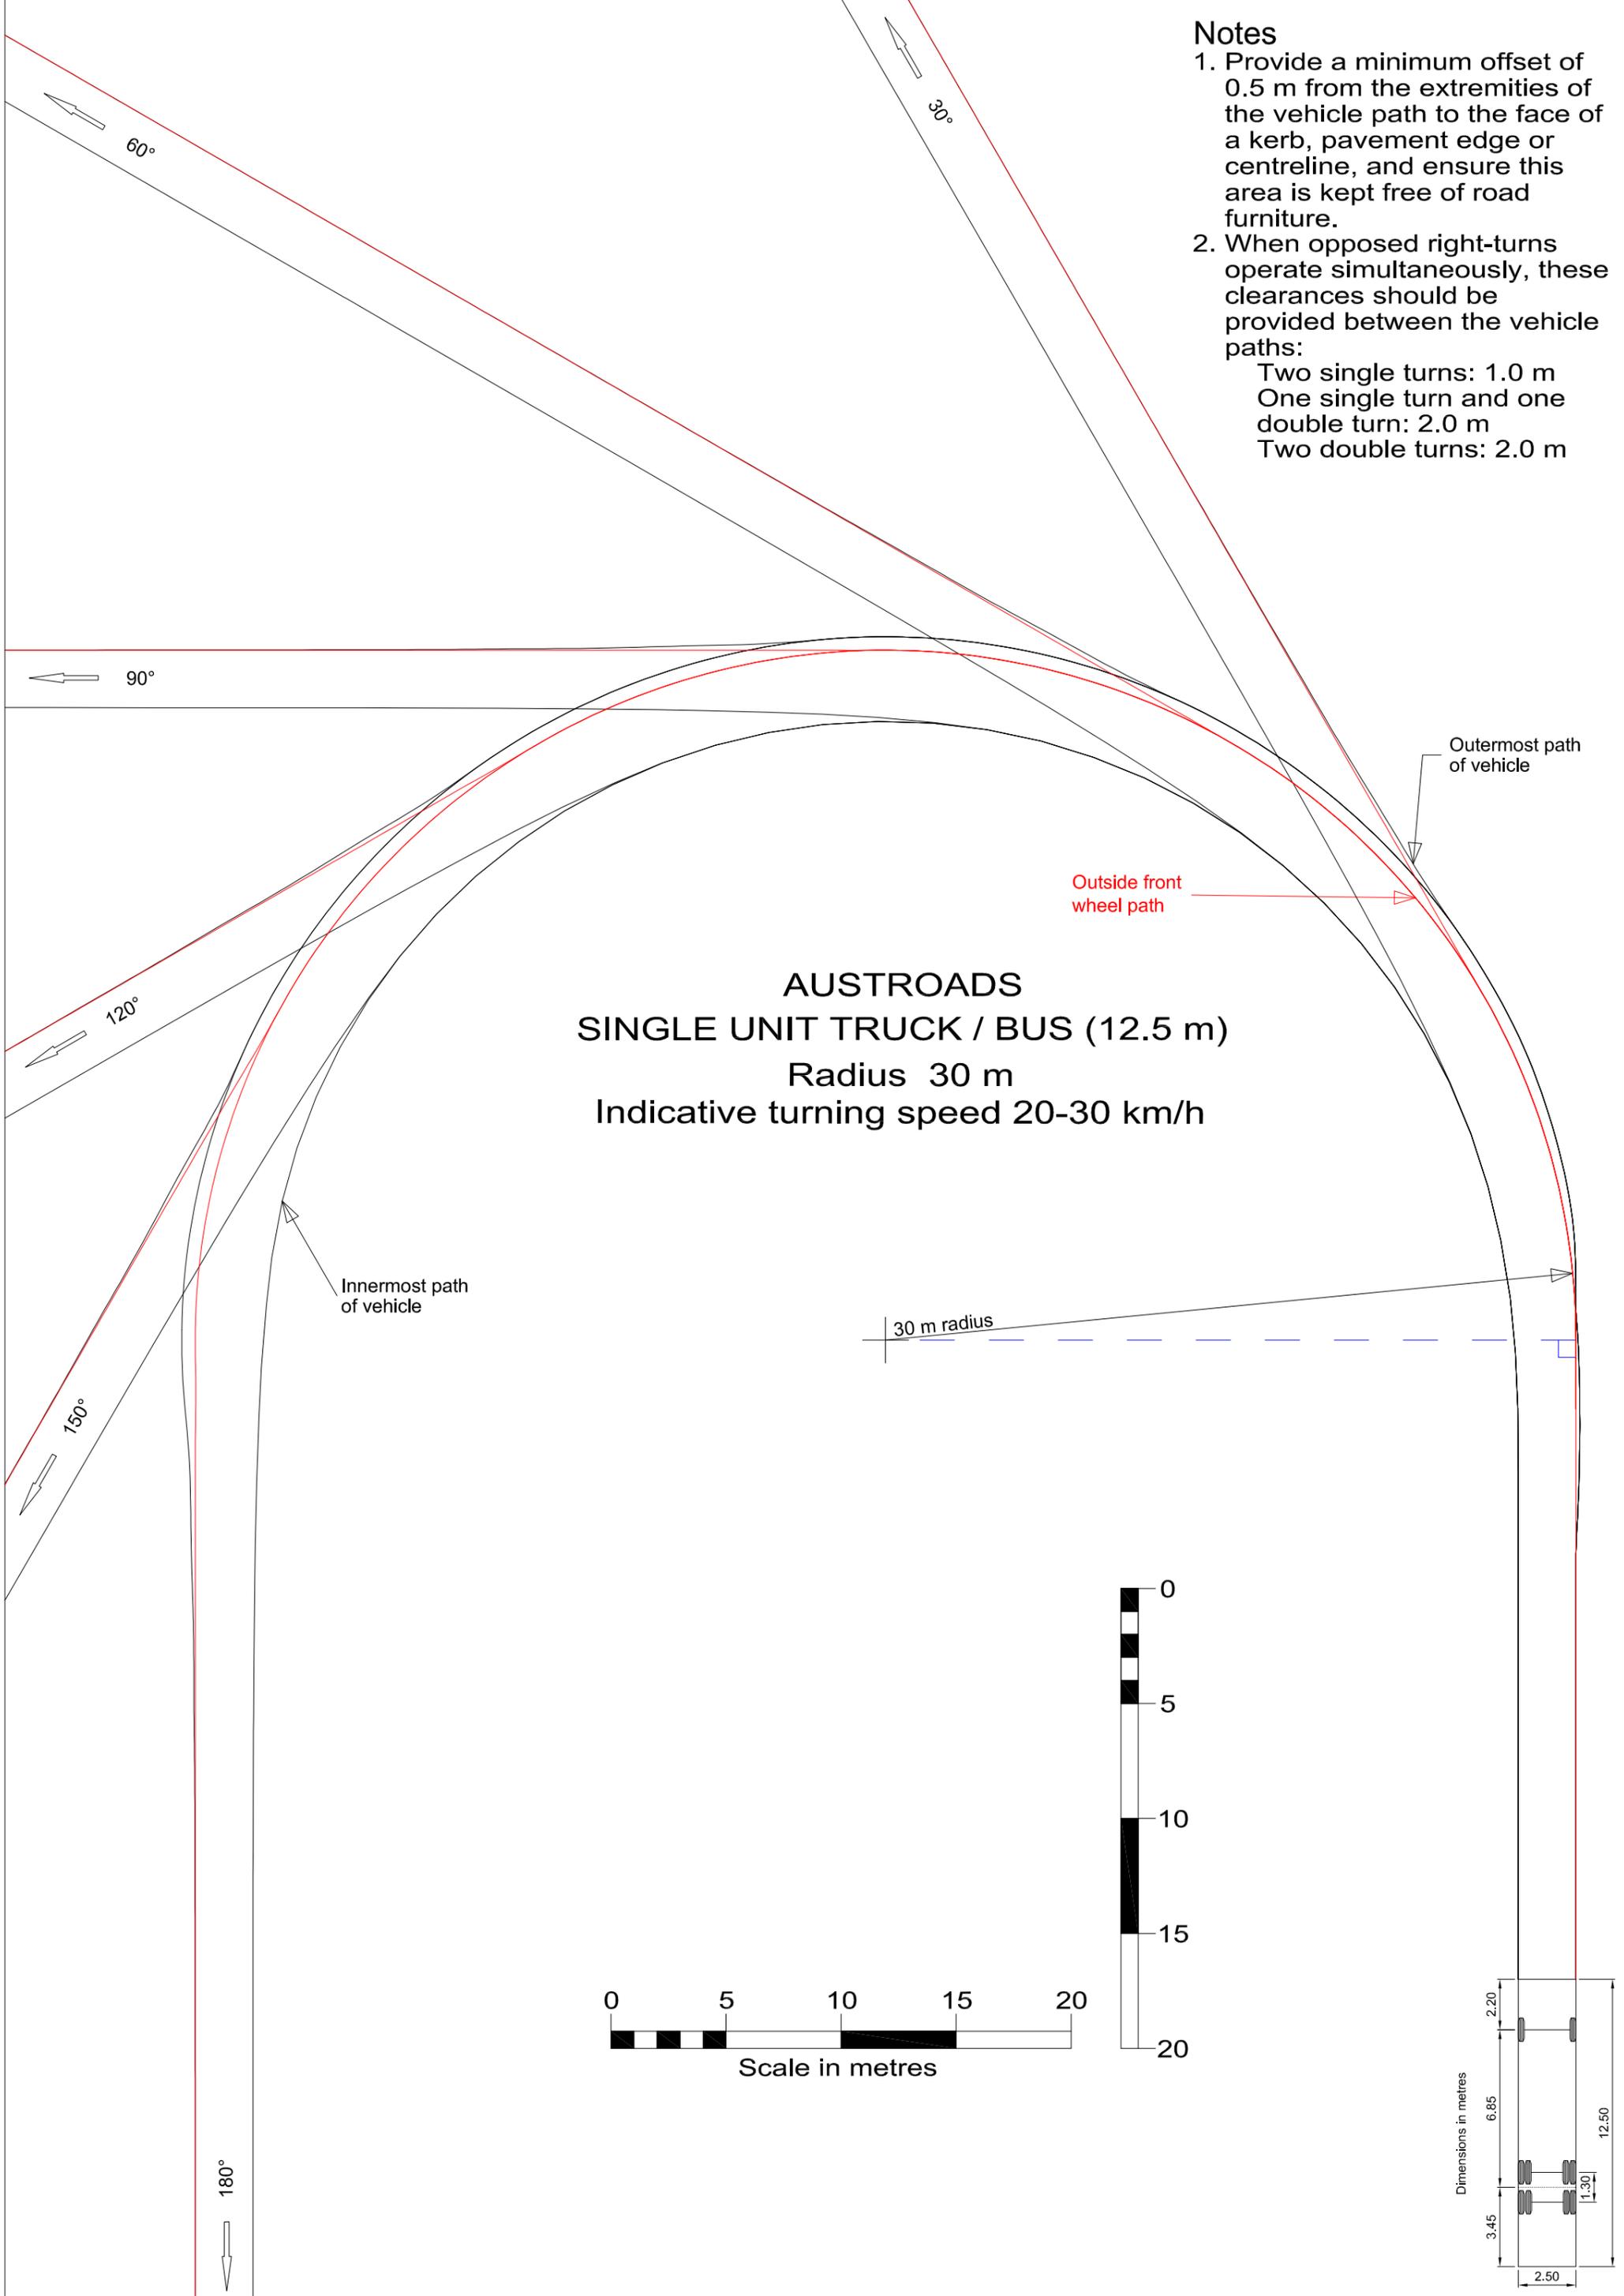