


**AUSTROADS**  
**PRIME MOVER & LONG**  
**SEMI-TRAILER (25 m)**  
**Radius 15 m**  
**Indicative turning speed 5-15 km/h**

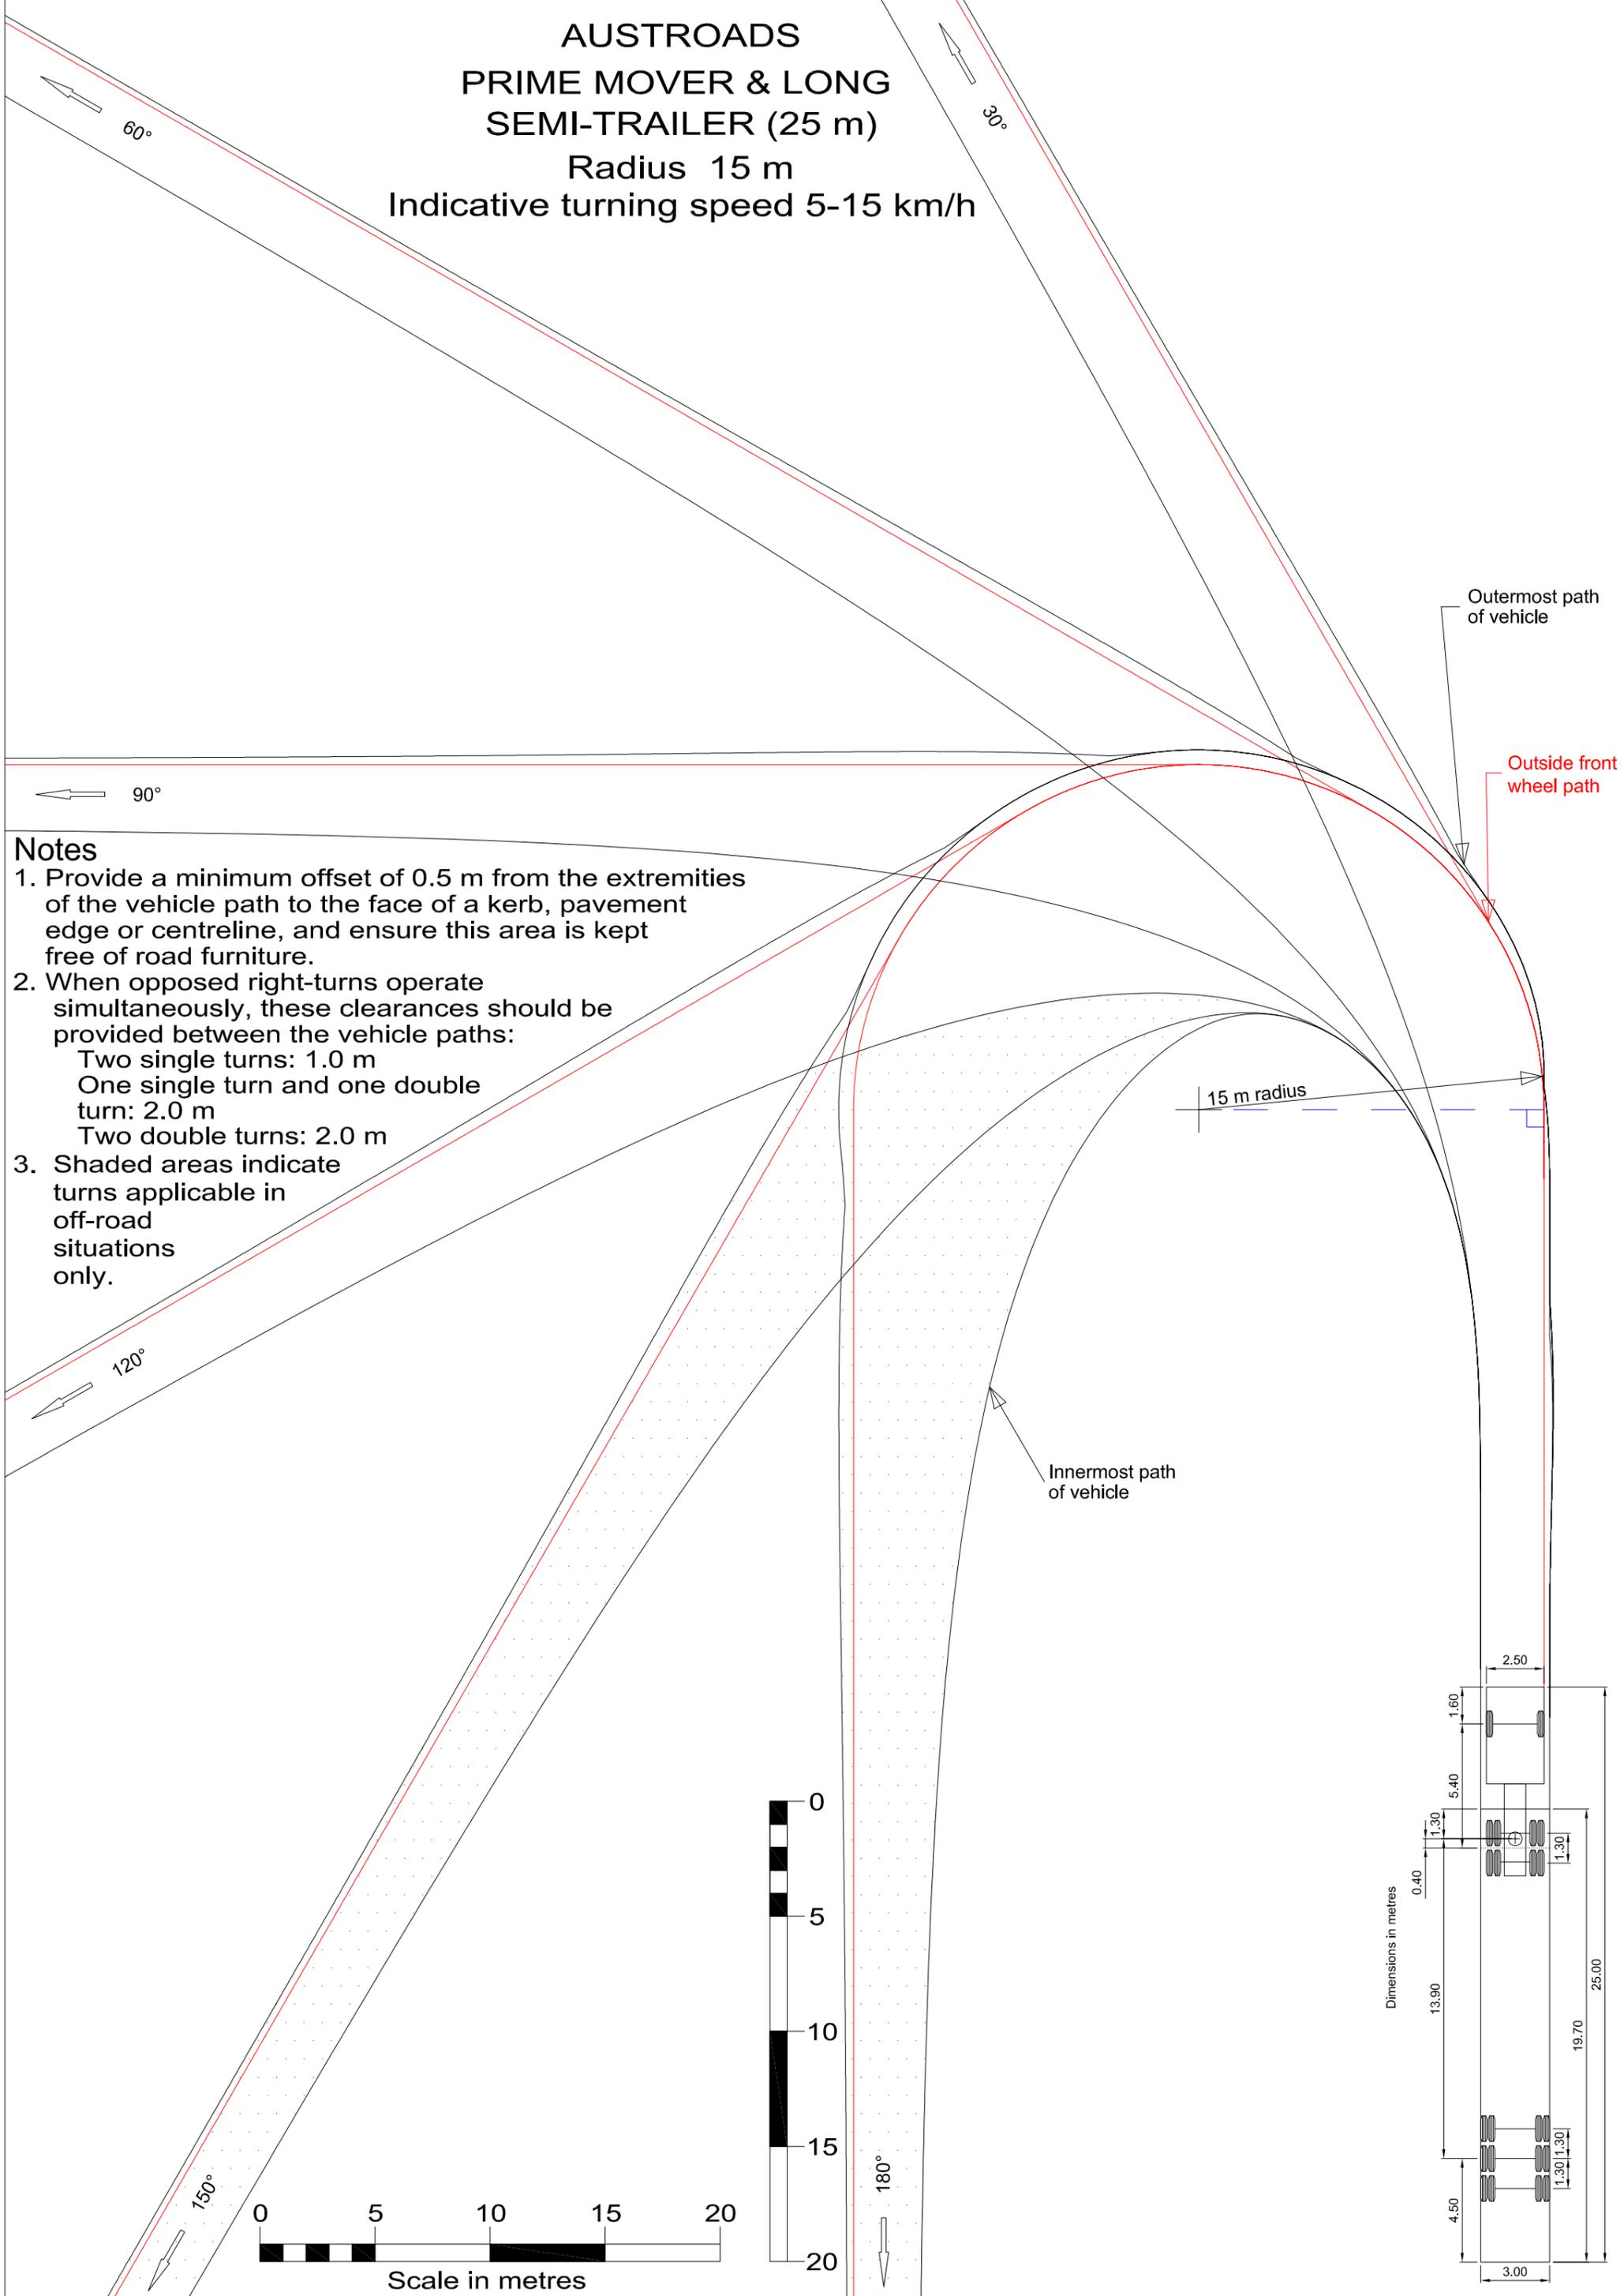

**Notes**

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:  
 Two single turns: 1.0 m  
 One single turn and one double turn: 2.0 m  
 Two double turns: 2.0 m
3. Shaded areas indicate turns applicable in off-road situations only.

Outermost path of vehicle

Outside front wheel path

15 m radius

Innermost path of vehicle

