

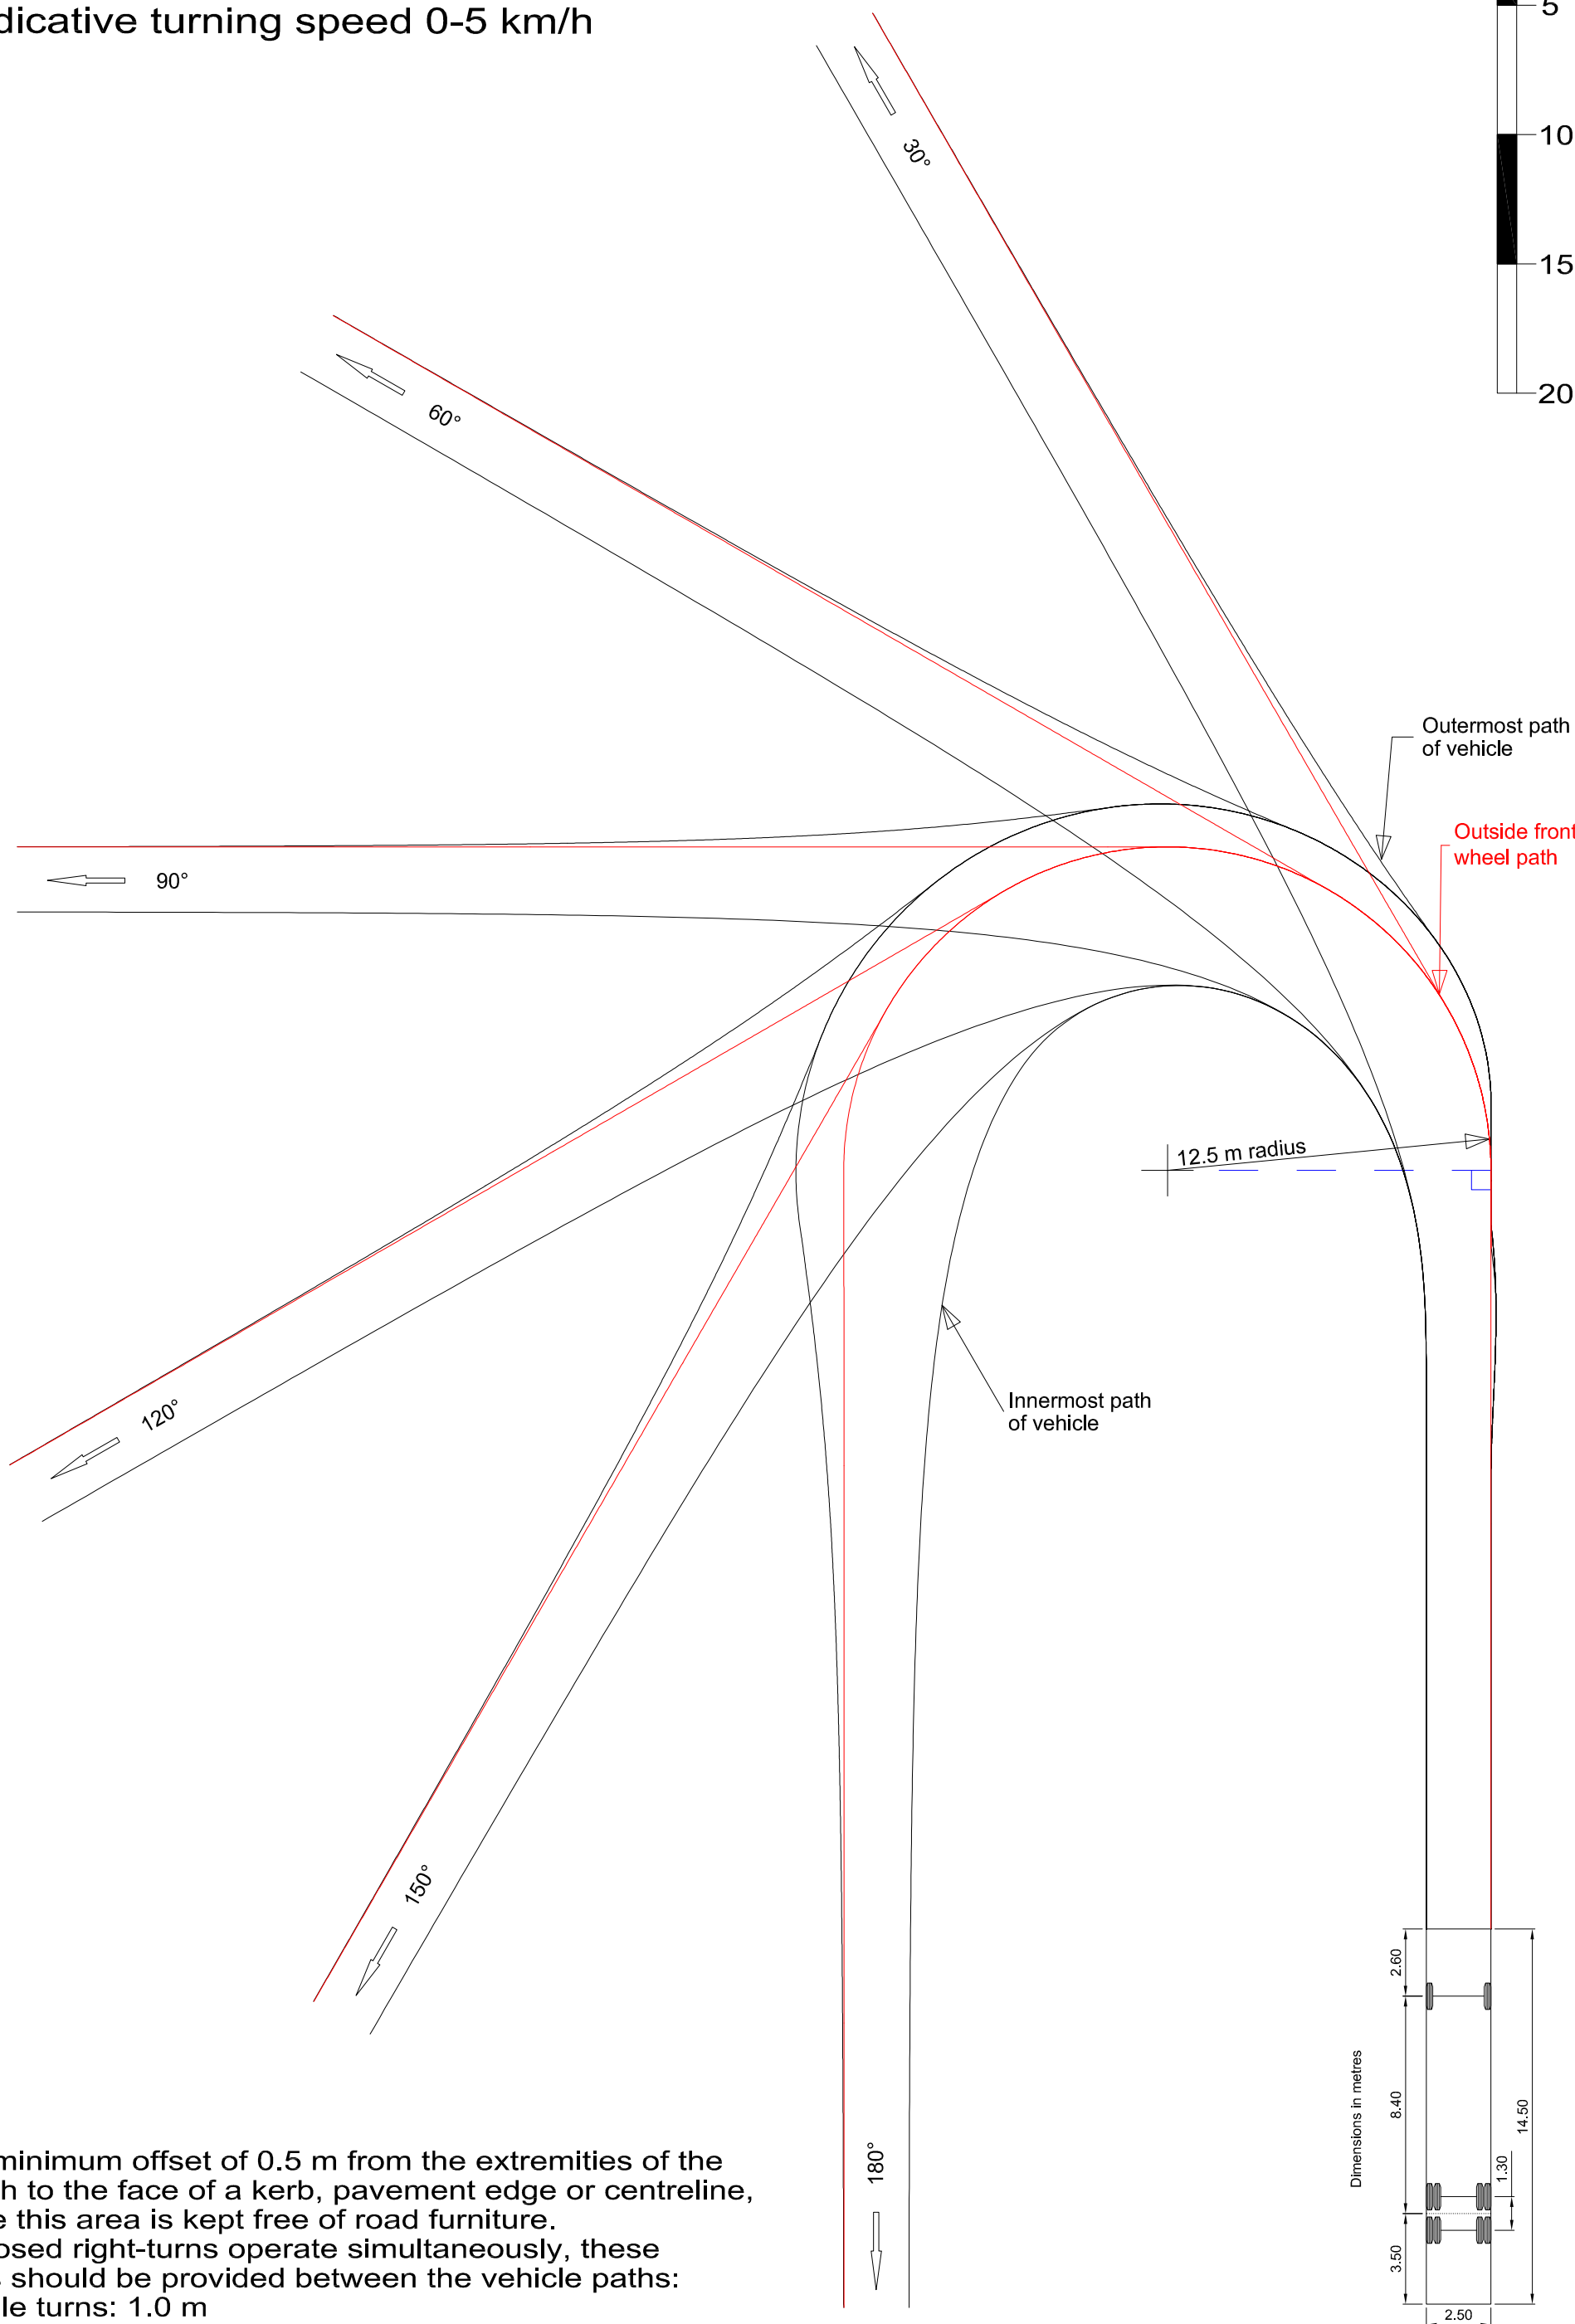


AUSTROADS
LONG RIGID BUS (14.5 m)
Radius 12.5 m
For use at mandatory stop only
Indicative turning speed 0-5 km/h



Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 - Two single turns: 1.0 m
 - One single turn and one double turn: 2.0 m
 - Two double turns: 2.0 m

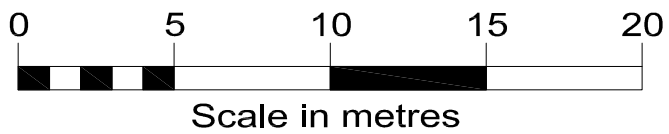