
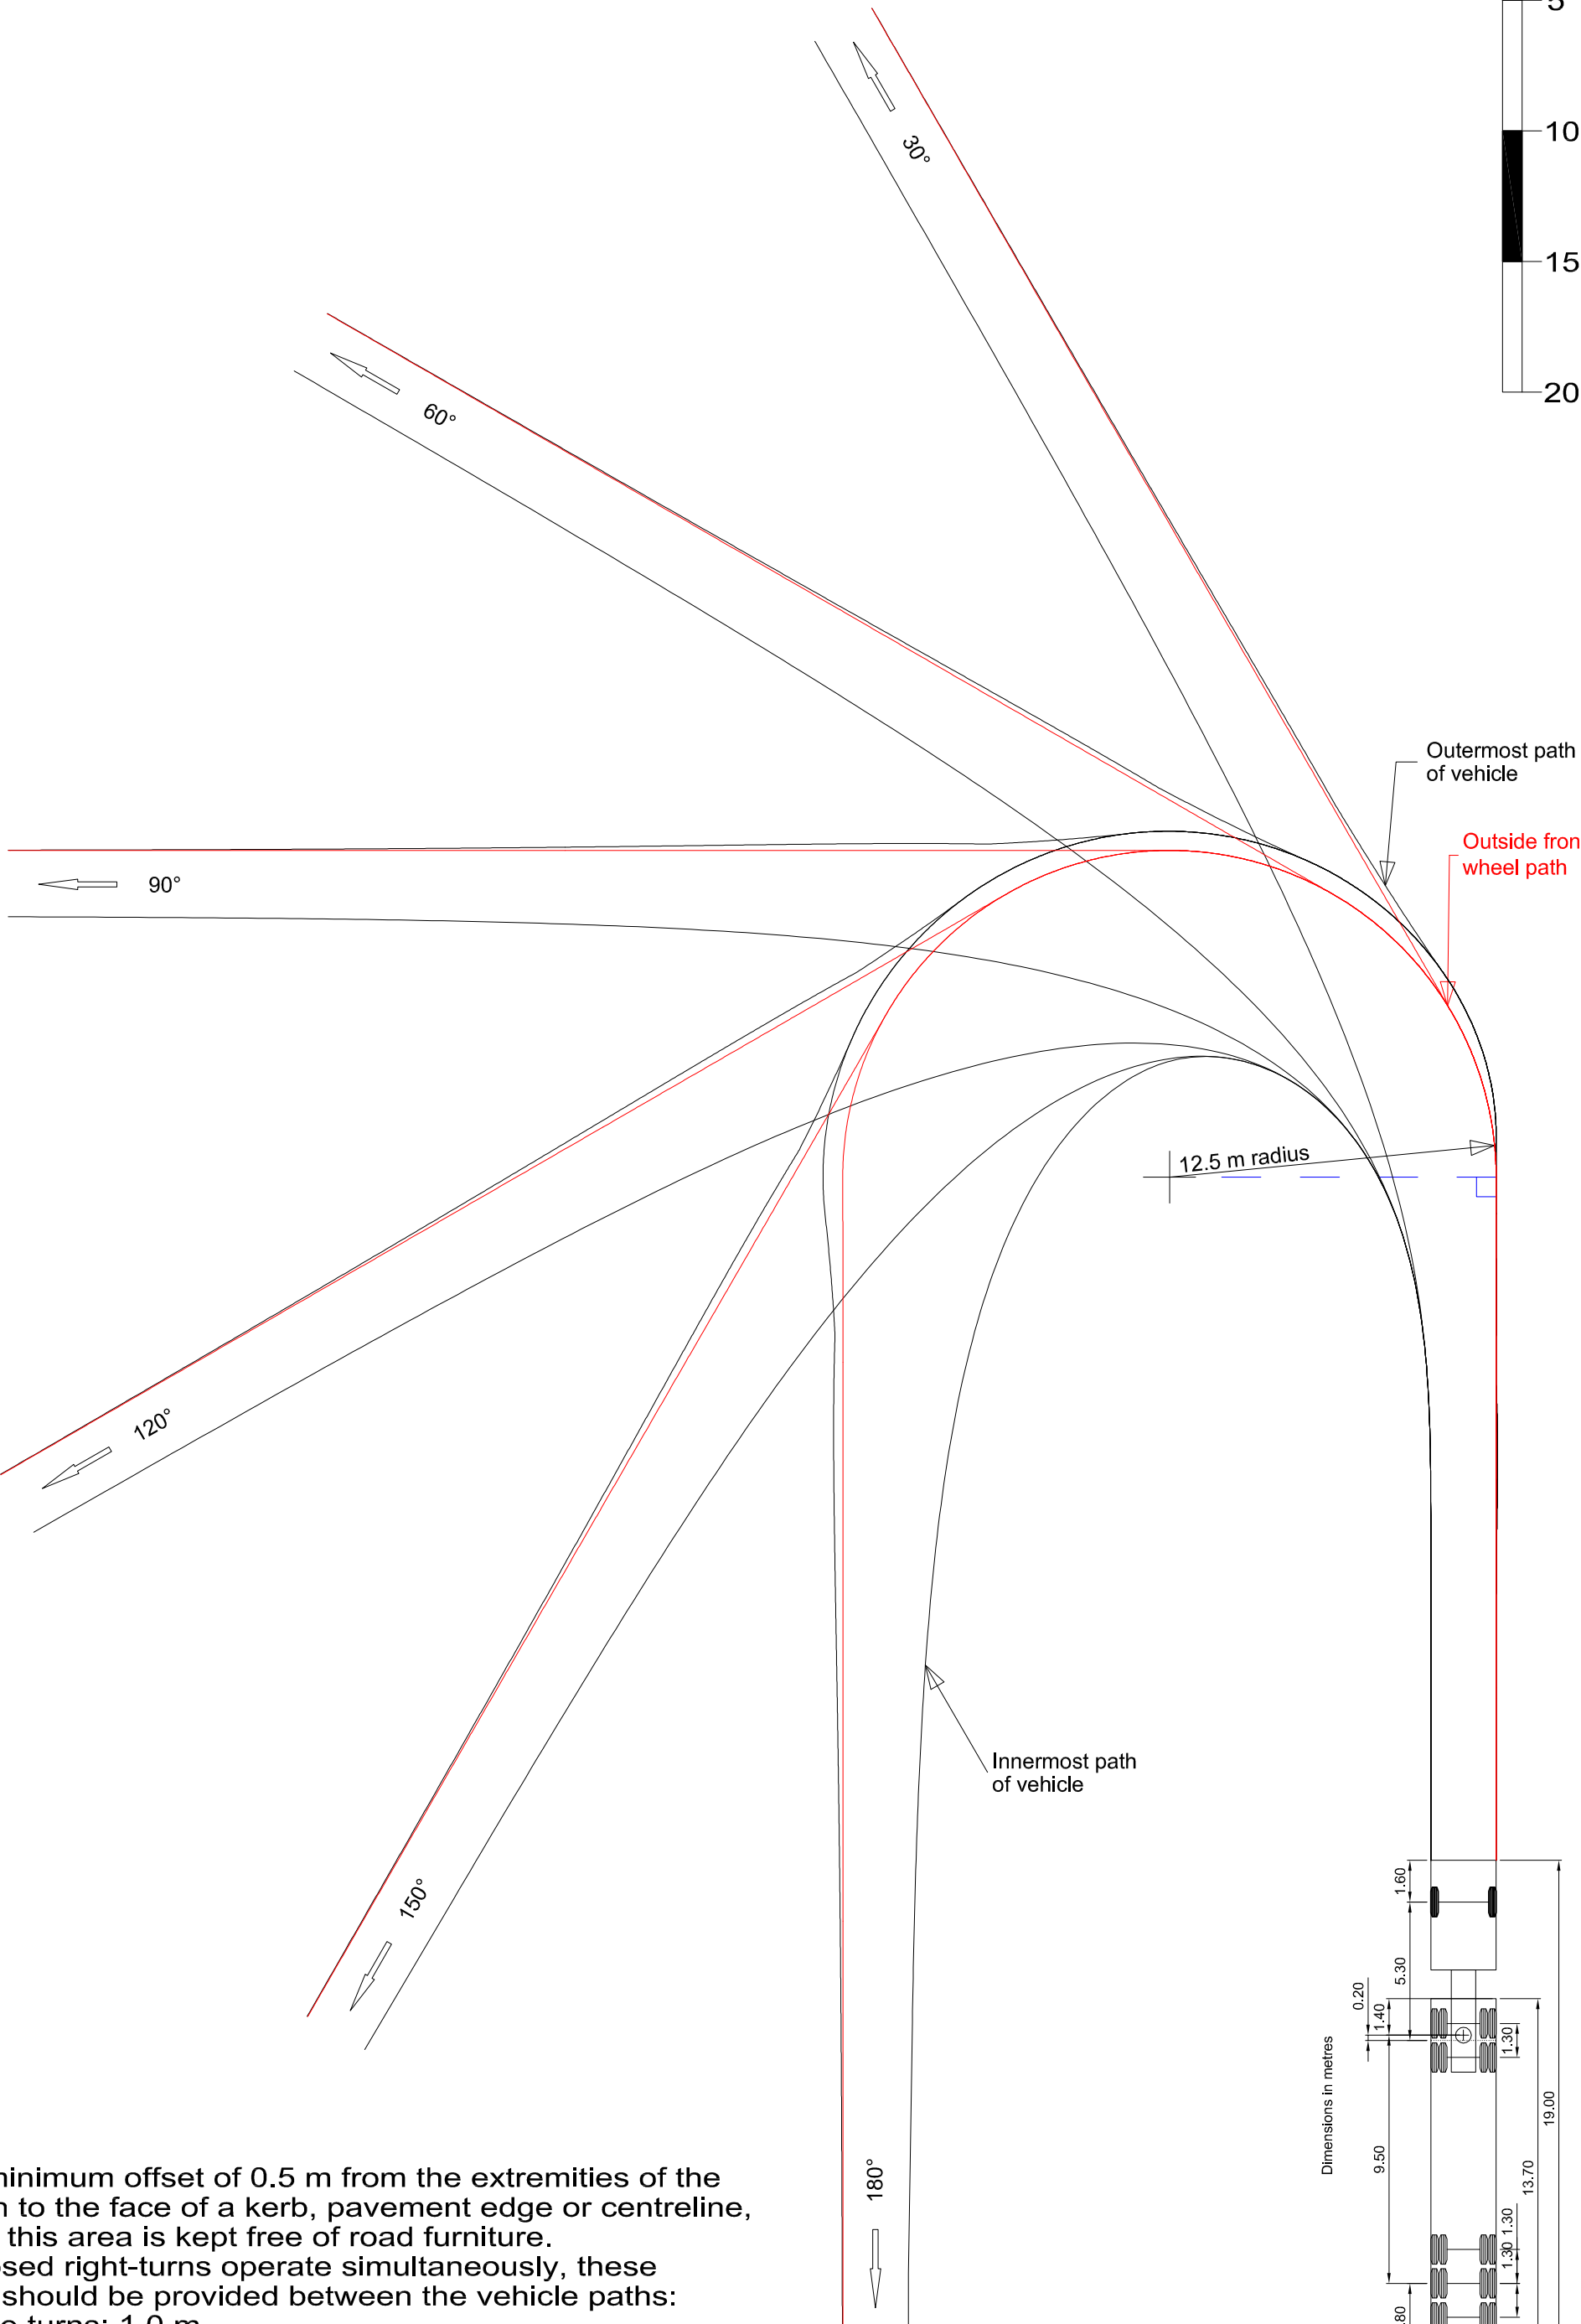


AUSTROADS

PRIME MOVER & SEMI-TRAILER (19 m)

Radius 12.5 m

Indicative turning speed 0-5 km/h

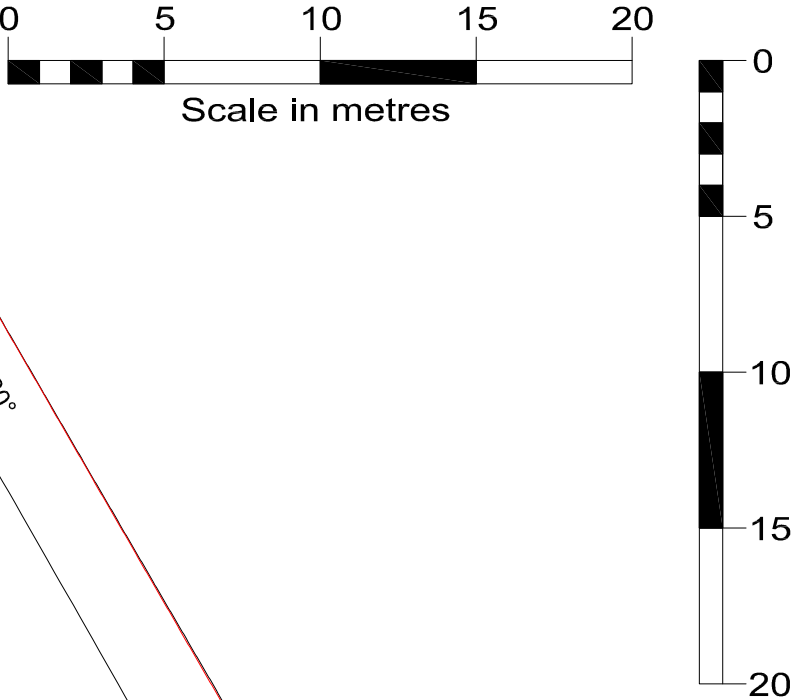

- Notes
- 1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
  - 2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
    - Two single turns: 1.0 m
    - One single turn and one double turn: 2.0 m
    - Two double turns: 2.0 m