


Notes

1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
 Two single turns: 1.0 m
 One single turn and one double turn: 2.0 m
 Two double turns: 2.0 m

AUSTROADS
PRIME MOVER & SEMI-TRAILER (19 m)
 Radius 20 m
 Indicative turning speed 15-20 km/h

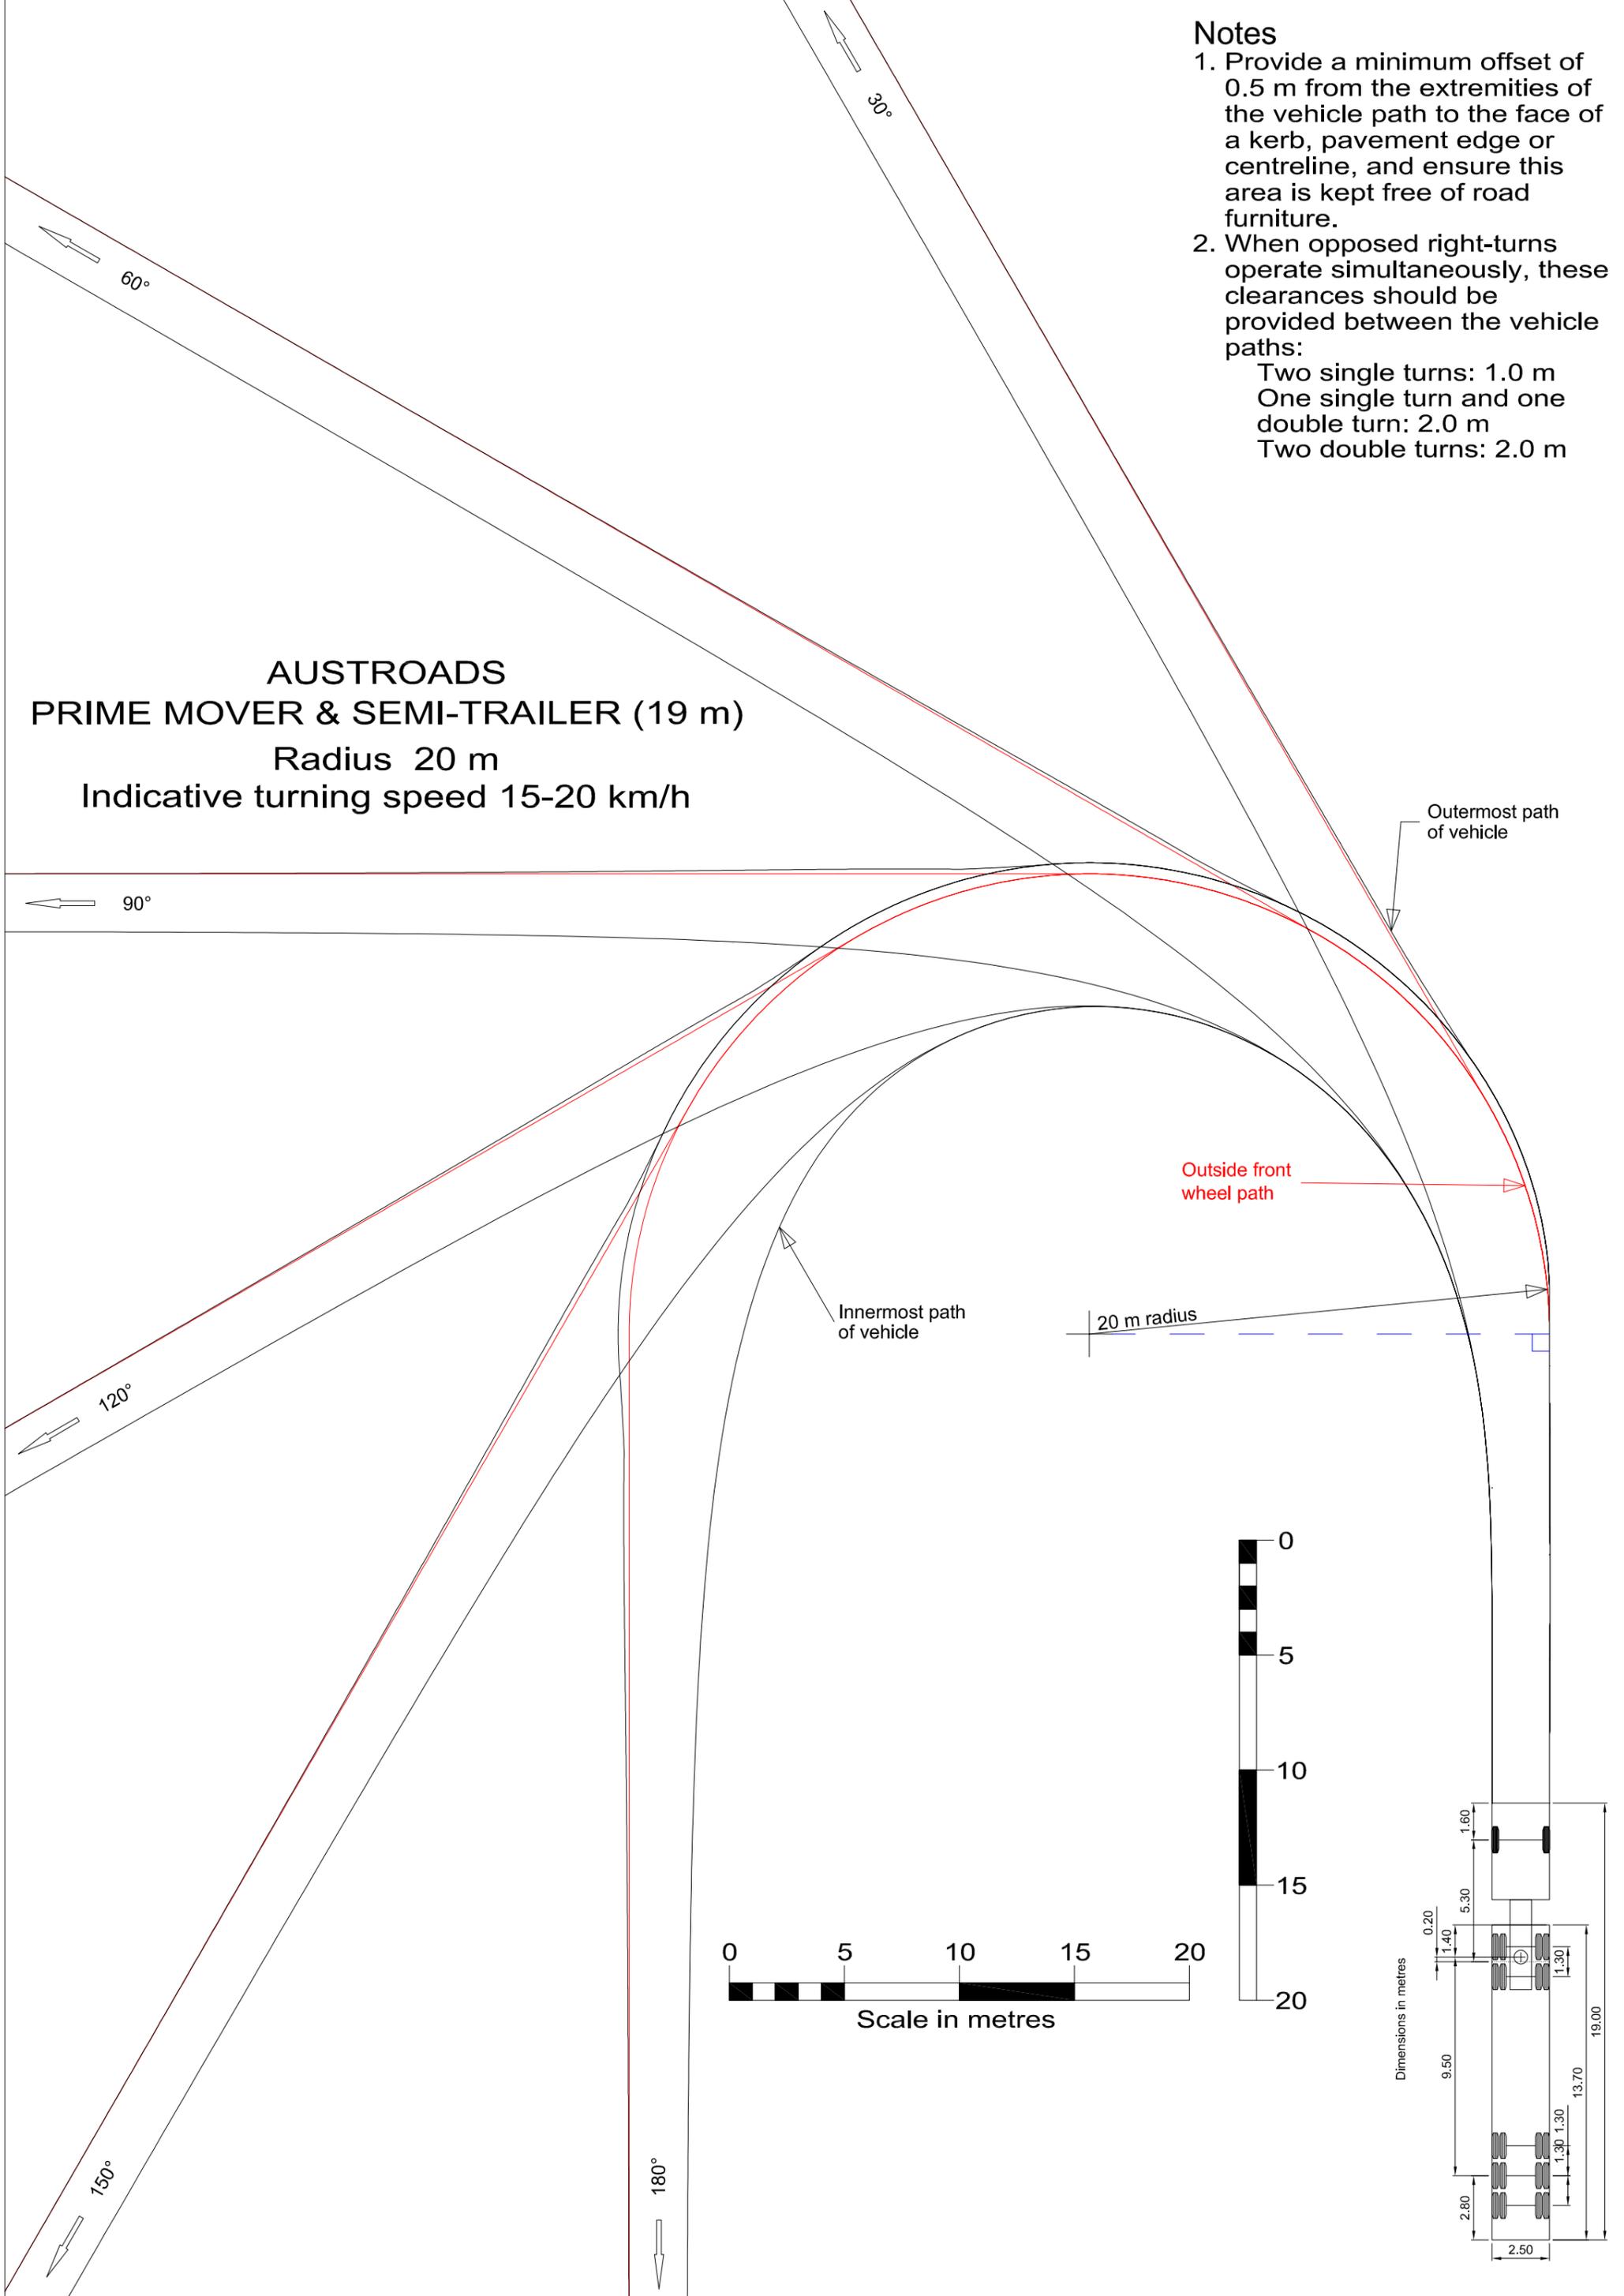

Outermost path of vehicle

Outside front wheel path

Innermost path of vehicle

20 m radius

