
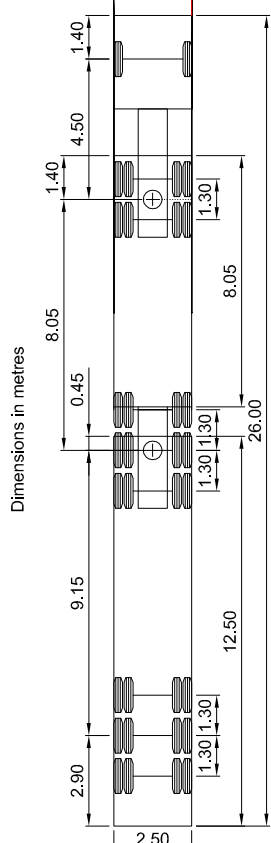
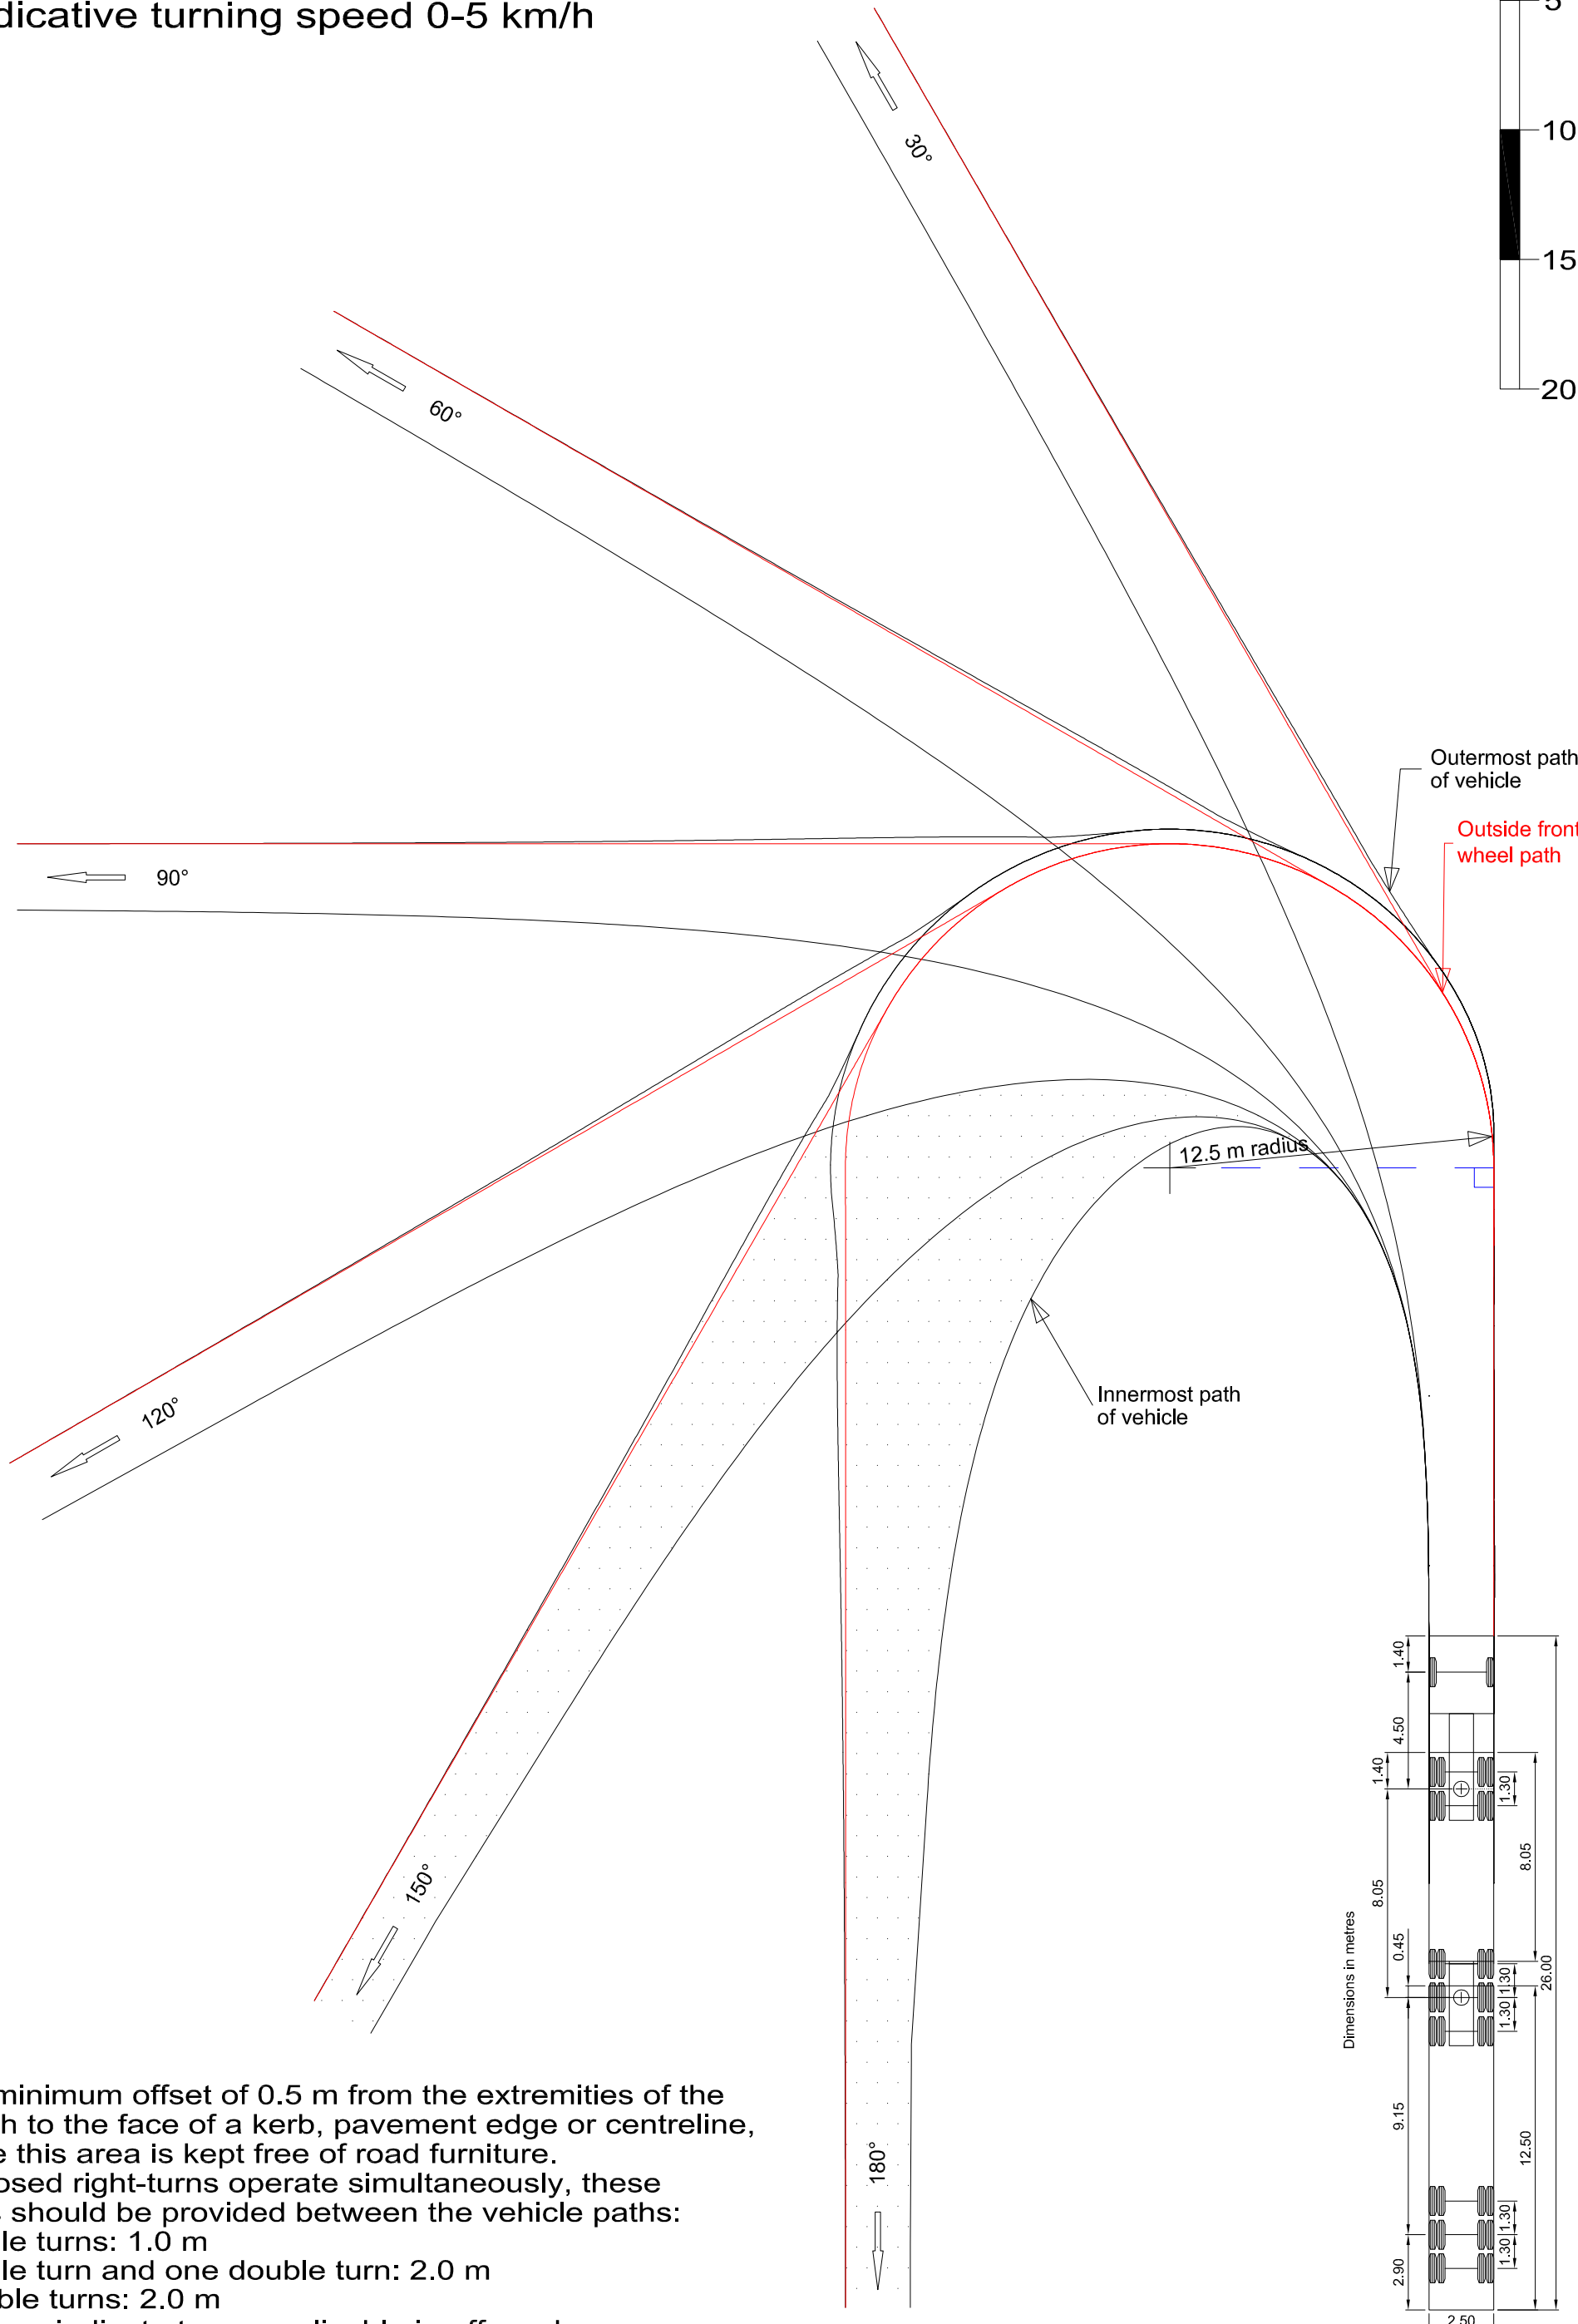



AUSTROADS
B-DOUBLE (26 m)
Radius 12.5 m
For use at mandatory stop only
Indicative turning speed 0-5 km/h

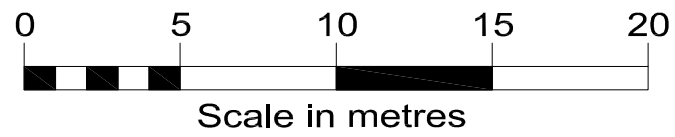

- Notes
1. Provide a minimum offset of 0.5 m from the extremities of the vehicle path to the face of a kerb, pavement edge or centreline, and ensure this area is kept free of road furniture.
 2. When opposed right-turns operate simultaneously, these clearances should be provided between the vehicle paths:
Two single turns: 1.0 m
One single turn and one double turn: 2.0 m
Two double turns: 2.0 m
 3. Shaded areas indicate turns applicable in off-road situations only.